



C2R-VW




Radio Replacement interface for 2002-2007 VW
 Use for Aftermarket Navigation radios that require Vehicle Speed Sense, Reverse, Parking Brake and Illumination inputs.

Compatible Vehicles (With the Monsoon, Dynaudio or Standard Audio System):


Eos - 2006-2008, *Golf - 2002-2008, *GTI - 2002-2008, *Jetta - 2002-2007, *Passat - 2002-2007, Rabbit - 2006-2008

* 2002-2005 VW vehicles do not have a reverse or parking brake signal on the CAN-Bus. The Green and Red/White wires do not function for these model year vehicles. Parking brake and reverse signal wires can be found with a volt meter in the vehicles factory wiring. Vehicle must have a factory installed double din headunit (4" tall).

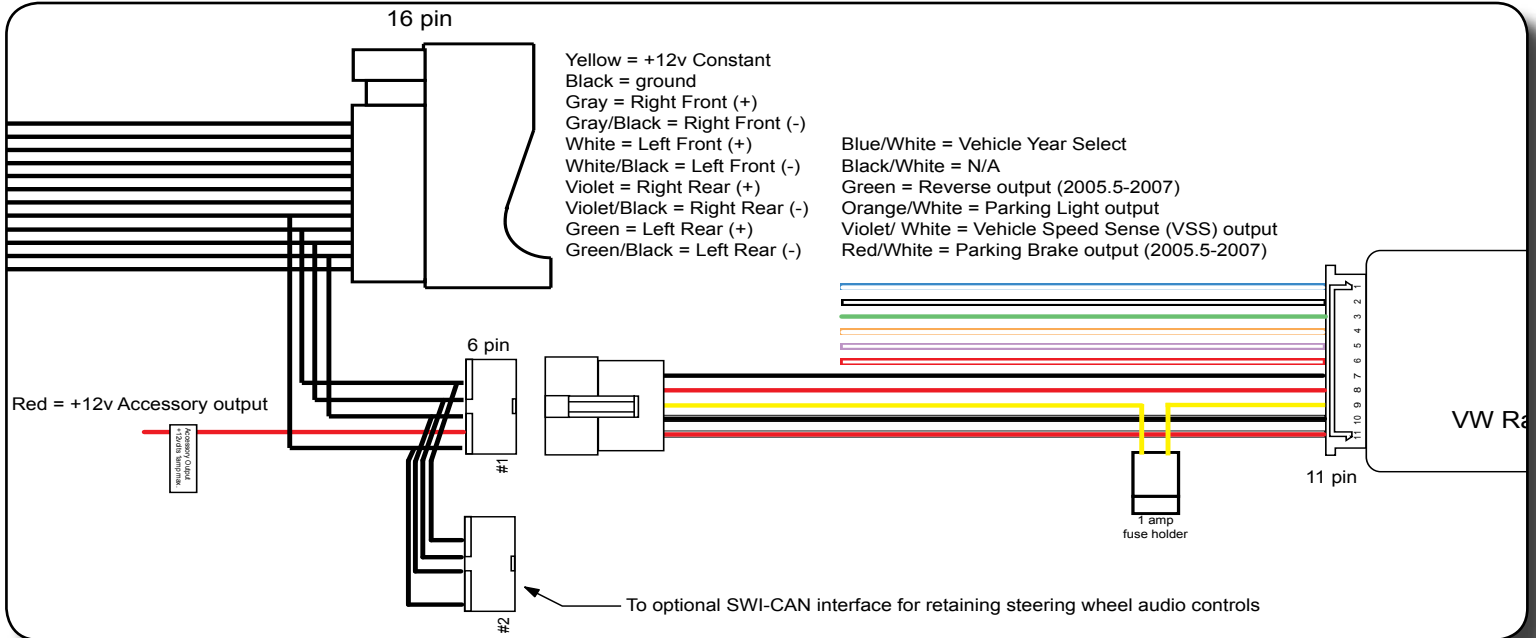

Installation:

1. Connect the aftermarket radio's front and rear speaker wires to the 16 pin plug.
 3. The 16 pin harness has a yellow and a black wire. Connect the yellow to the radio's +12v constant wire and the black to the radio's ground wire.
 4. The accessory wire is located on the 6 pin harness - connect this wire to the radio's accessory wire. The accessory wire supplies +12v, 1 amp max, when key is in the accessory or Ignition position. If more current is needed refer to Fig. 1.
 5. 11 pin plug:
 1. Blue/White - For 2002-2005, Connect this wire to the Battery 12v source. For 2005.5-2007, Insulate and DO NOT USE!
 2. Black/White - N/A.
 3. Green - Connect this wire to the radio's Reverse input wire only.
 4. Orange/White - Connect this wire to the radio's Illumination input wire only.
 5. Violet/White - Connect this wire to the radio's VSS input wire only.
 6. Red/White - Connect this wire to the radio's Parking brake input wire only.
- Note: Do not connect these wires to any other circuit besides the radio's wire harness.

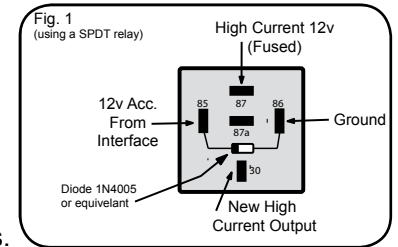

6. When all connections are made, connect the 16 pin plug into the vehicle's 16 pin harness.
7. Refer to the radio's manual for testing VSS, Reverse, Parking Brake and Illumination inputs (if used).

DISCLAIMER: Under no circumstances shall the manufacturer or the distributors of the C2R-VW parts be held liable for consequential damages sustained in connection with the C2R-VW. The manufacture and it's distributors will not, nor will they authorize any representative or any other individual to assume obligation or liability in relation to the C2R-VW other than its replacement.